


# DIP SWITCH TI(I)M SERIES

Tri-state  
Low Profile Type

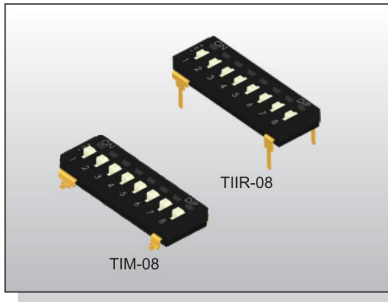

### FEATURES

- ※3-state setting
- ※Low profile for space saving


### APPLICATION

- ※Remote control
- ※Home automation
- ※Telecommunication


### SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	1,000gf max.
Travel	0.8mm
Operating Life	2,000 cycles
Operating Temp.	-20°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

### HOW TO ORDER

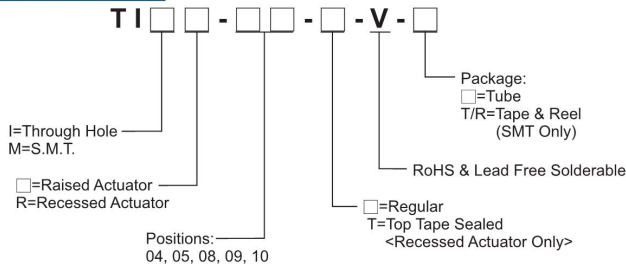

### CIRCUIT

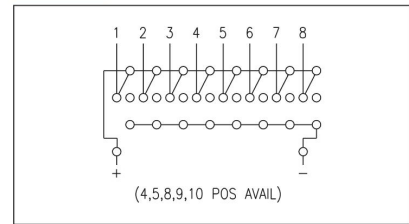


### PACKAGE



- <Tube>
- TII(R)/TIM(R)-04: 41 pcs
  - TII(R)/TIM(R)-05: 34 pcs
  - TII(R)/TIM(R)-08: 22 pcs
  - TII(R)/TIM(R)-09: 20 pcs
  - TII(R)/TIM(R)-10: 18 pcs
- <Tape & Reel>
- TIM(R): 900 pcs

DIP SWITCH

## TII(R)

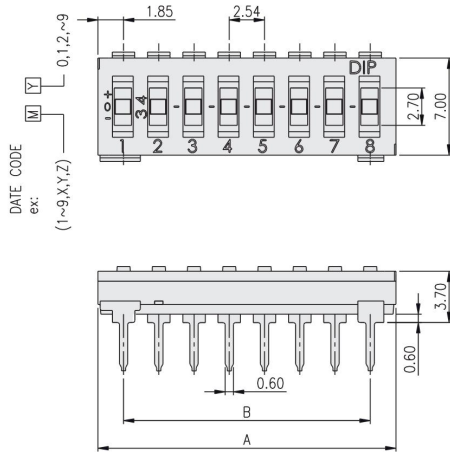

PART NO.	NO. OF POS.	DIM.A	DIM.B
TII(R)-04	4	11.32	7.62
TII(R)-05	5	13.86	10.16
TII(R)-08	8	21.48	17.78
TII(R)-09	9	24.02	20.32
TII(R)-10	10	26.56	22.86

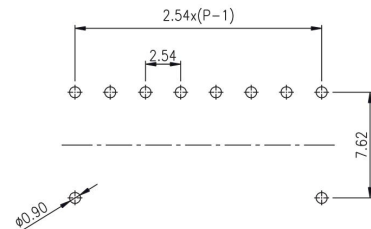

P.C.B. LAYOUT


DIP SWITCH  
**TI(I)M** SERIES

Tri-state  
 Low Profile Type






TIM(R)

DIP SWITCH

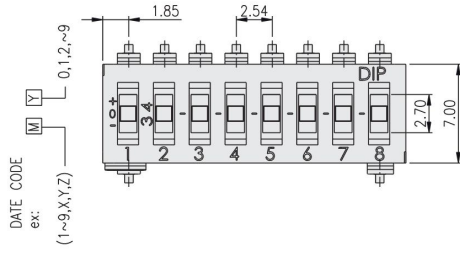

PART NO.	NO. OF POS.	DIM.A	DIM.B
TIM(R)-04	4	11.32	7.62
TIM(R)-05	5	13.86	10.16
TIM(R)-08	8	21.48	17.78
TIM(R)-09	9	24.02	20.32
TIM(R)-10	10	26.56	22.86

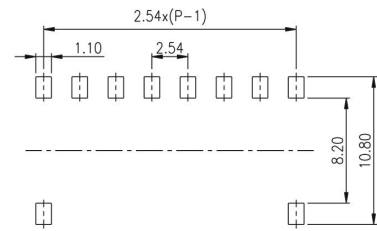

P.C.B. LAYOUT