


ROTARY CODED SWITCH  
**SV3A-4** SERIES

10x10mm  
Selector Rotary Type

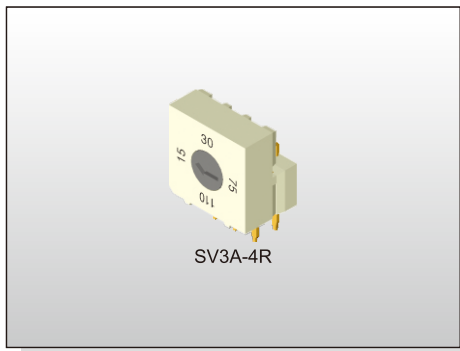

**FEATURES**

- ※ Through hole pin type
- ※ Flush Actuator
- ※ 20,000 steps mechanical Life

**APPLICATION**


- ※ Building & home automation
- ※ White goods
- ※ Electronic instrument

**SPECIFICATION**

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 250V DC
Dielectric Strength	250V AC/1 minute
Operating Force	200gf-cm max.
Operating Life	20,000 steps
Operating Temp.	-25°C ~ +80°C
Storage Temp.	-40°C ~ +85°C

**HOW TO ORDER**

**S V 3 A - 4 R - V - B**



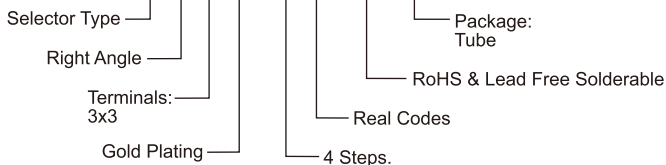


**PACKAGE**


<Tube>  
48 pcs

ROTARY CODED SWITCH

**SV3A-4**

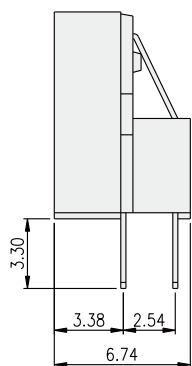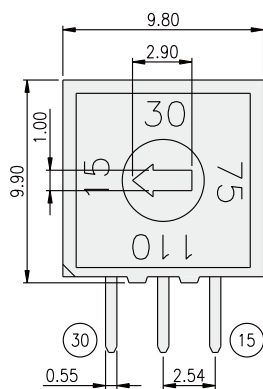

		CODE			
POSITION		15	30	75	110
15	○ ON	○	●	●	●
30	● OFF	●	○	●	●
75		●	●	○	●
110		●	●	●	○



P.C.B. LAYOUT